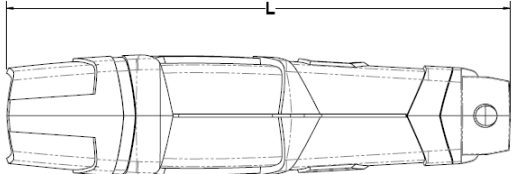

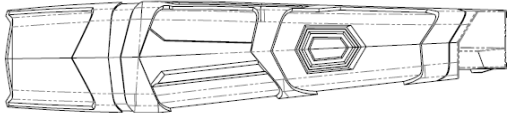


AXON Flex™ Camera Models			
Model		Model No.	Color
AXON Flex Camera ¹		73000 series	Black
Specifications		Features	
<div>1. Operating temperature range: -4 °F to 122 °F [-20 °C to 50 °C]</div> <div>2. Storage temperature range:² -4 °F to 95 °F [-20 °C to 35 °C]</div> <div>3. 75° field of view camera lens</div> <div>4. Humidity: 80 percent non-condensing, when cable is attached</div> <div>5. 30-second pre-event video buffer. Buffer does not include audio. Note: Buffer time can change depending on device state.</div> <div>6. Up to 30 frames per second.</div> <div>7. 640 x 480 VGA video resolution</div> <div>8. Up to 8 GB non-removable, solid state storage³</div> <div>9. Approximately 4 hours video storage under highest quality recording settings; up to 9 hours storage under medium quality recording settings; and up to 13 hours storage available at lowest quality recording setting.</div> <div>10. Rechargeable Lithium-Ion Battery⁴</div>		<div>1. Ambidextrous design for left- or right-side mounting.</div> <div>2. Multiple attachment options available, including: Oakley Flak Jacket® eyewear mount; Low Rider headband; Collar mount; Epaulette/shoulder mount; and Helmet mount.</div> <div>3. Playback via the AXON™ Mobile smart phone application or EVIDENCE Sync software.</div> <div>4. Several cable styles and cable lengths are available.⁵</div> <div>5. Configurable bit rate (multiple settings to optimize file size and upload speed)</div> <div>6. Full color audiovisual camera</div> <div>7. Retina Low-Light capability less than 1 lux</div> <div>8. Constructed from impact resistant polymer</div> <div>9. Data is protected by TASER proprietary security features and can be viewed and downloaded with EVIDENCE.com services through the AXON Flex Evidence Transfer Manager (ETM)⁶ and EVIDENCE Sync software.</div> <div>10. Data download to personal computer through EVIDENCE Sync software is also available.</div> <div>11. GPS tagging and streaming capability available through Android™ and iPhone® AXON™ Mobile applications.</div>	
Physical Characteristics ^{7,8}			
Dimensions			
Length (L)	Height (H)	Width (W)	Weight
3.2 in [8.1 cm]	0.8 in [2.0 cm]	0.7 in [1.8 cm]	0.53 oz (15 g)
<div><div><p>RIGHT SIDE</p></div><div><p>FRONT</p></div><div><p>TOP</p></div></div>			

¹ Requires a cable connection to the AXON Flex Controller (model number 73001) to function.

² Less than 1 month at the high temperature. Long-term storage should be in a climate-controlled environment.

³ Multi-Level Cell flash memory is rated for approximately 10,000 write cycles. The current technology along with normal usage, which includes recording and buffering and ETM sync processes, typically gives memory components a useful life of 4 to 5 years. A portion of the memory is reserved for the operating system.

⁴ The AXON Flex camera contains a non-replaceable Lithium-Ion battery. Rechargeable Lithium-Ion batteries have a limited life of approximately 2 years, and will gradually lose their capacity to hold a charge. This loss of capacity (aging) is irreversible. As the battery loses capacity, the length of time it will power your device (run time) decreases. Additionally, Lithium-Ion batteries continue to slowly discharge (self-discharge) when not in use or while in storage. It is advised that you routinely check the battery's charge status. The device should be recharged regularly to maintain the internal chemistry of the battery. TASER product user manuals summarize how to check battery status as well as battery charging instructions. The latest product manuals are available at www.TASER.com

⁵ While all TASER products are thoroughly tested to ensure product reliability, all usage conditions cannot be anticipated. User checks are recommended to ensure connections remain snug and performance is unaffected. AXON Flex cables should be replaced at the first sign of wear or breakdown to ensure reliable function and use.

⁶ User account and subscription required.

⁷ Product specification may change without notice; actual product may vary from picture.

⁸ Dimensions and weights are for reference only.